


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XM-COLOR
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: GOLD PLATED BeCu.
 SPRING: STAINLESS STEEL.
2. P/N: 9202-COLOR
 HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-200/COLOR
 22AWG TINNED COPPER
 0.070 [1.78] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE
 MAXIMUM CURRENT: 2.5 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 1000 W.V.D.C.
 MAXIMUM TEMPERATURE: 200°F (93°C)

| LTR | REVISIONS | | DATE | APPROVED |
|-----|-------------|--|------|----------|
| | DESCRIPTION | | | |
| | | | | |

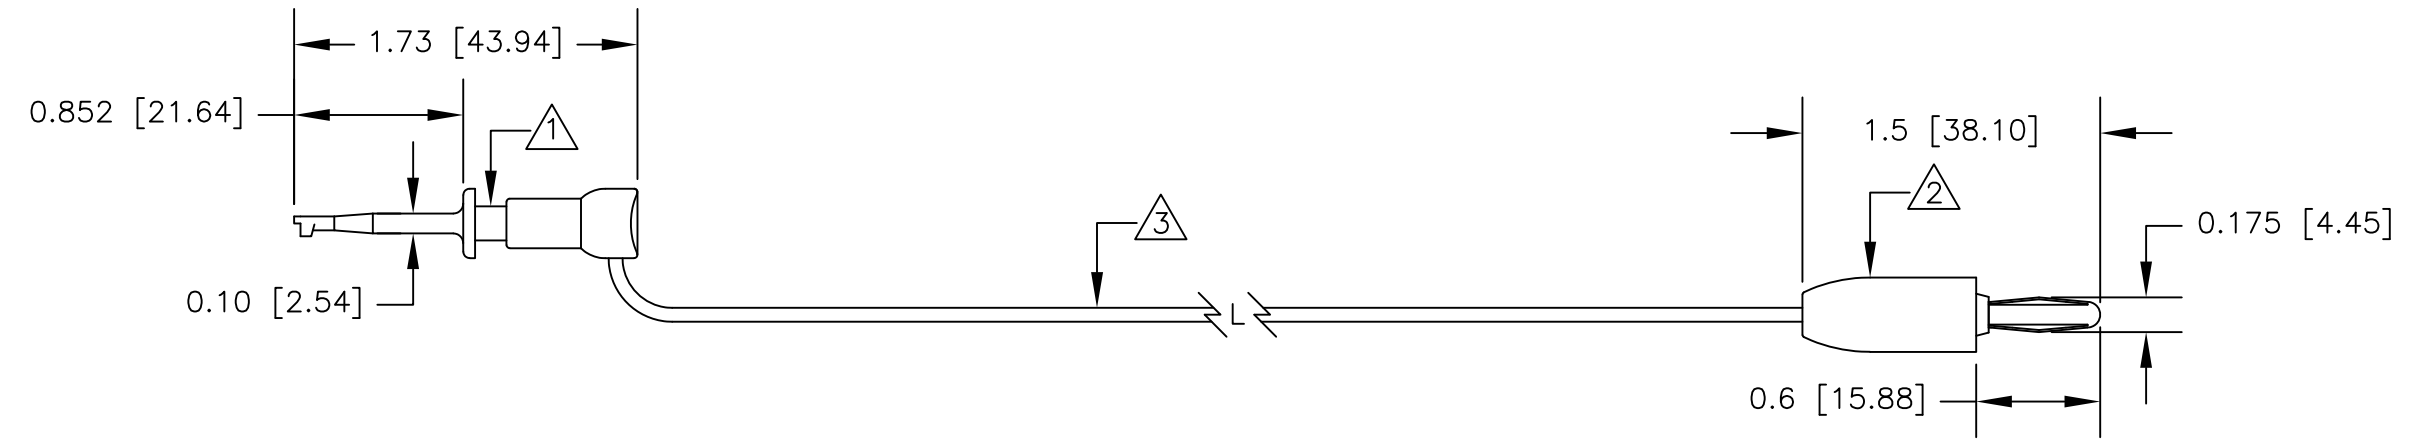

| | | | | | |
|-------------|---------|---|--------------|------|--|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ± | CONTRACT NO. | | E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. |
| | | | APPROVALS | DATE | |
| | | MATERIAL SEE NOTE. | DRAWN R.L. | 4/19 | DESCRIPTION XM MICROHOOK TO 9202 STD BAN PLUG |
| | | FINISH SEE NOTE. | APPROVED BY | | |
| NEXT ASSY | USED ON | | | | SIZE B |
| APPLICATION | | DO NOT SCALE DRAWING | | | CODE IDENT NO. 08505 |
| | | | | | DRAWING NO. BXM |
| | | | | | SCALE 1:1 |
| | | | | | SHEET 1 OF 1 |