


Product Selection Guide



Accessories

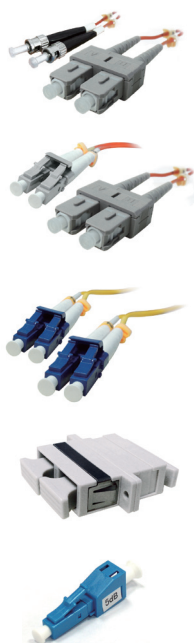

Fiber Patch Cord(FPC)/ Fiber Patch Adapter(FCA)/ Fiber Attenuator(FAT)					
Model Name	Optical Connector	Multi-mode	Single-mode	Diameter	Specification
FPC-SCSC-MM3M	SC / SC	•		62.5/125 μm	3 m
FPC-SCSC-SS3M	SC / SC		•	9/125 μm	3 m
FPC-SCLC-MM3M	SC / LC	•		62.5/125 μm	3 m
FPC-SCLC-SS3M	SC / LC		•	9/125 μm	3 m
FPC-SCST-MM3M	SC / ST	•		62.5/125 μm	3 m
FPC-SCST-SS3M	SC / ST		•	9/125 μm	3 m
FPC-LCLC-MM3M	LC / LC	•		62.5/125 μm	3 m
FPC-LCLC-SS3M	LC / LC		•	9/125 μm	3 m
FCA-SC-MM	SC / SC	•		62.5/125 μm	-
FCA-SC-SS	SC / SC		•	9/125 μm	-
FAT-LC-SS05	LC / LC		•	9/125 μm	5 db
FAT-LC-SS10	LC / LC		•	9/125 μm	10 db
FAT-LC-SS15	LC / LC		•	9/125 μm	15 db
FAT-LC-SS20	LC / LC		•	9/125 μm	20 db

DIN-Rail Power Supply	
Regular Type	
Model Name	Description
DR-4512	45W DIN-Rail 12VDC/3.5A Power Supply with universal 100 to 240VAC input, -10~50°C
DR-4524	45W DIN-Rail 24VDC/2A Power Supply with universal 100 to 240VAC input, -10~50°C
DR-75-12	75W DIN-Rail 12VDC/6.3A Power Supply with universal 100 to 240VAC input, -10~60°C
DR-75-24	75W DIN-Rail 24VDC/3.2A Power Supply with universal 100 to 240VAC input, -10~60°C
DR-75-48	75W DIN-Rail 48VDC/1.6A Power Supply with universal 100 to 240VAC input, -10~60°C
DR-120-12	120W DIN-Rail 12VDC/10A Power Supply with 100 to 120VAC / 220 to 240VAC input, -10~60°C
DR-120-24	120W DIN-Rail 24VDC/5A Power Supply with 100 to 120VAC / 220 to 240VAC input, -10~60°C
DR-120-48	120W DIN-Rail 48VDC/2.5A Power Supply with 100 to 120VAC / 220 to 240VAC input, -10~60°C
SDR-240-48	240W DIN-Rail 48VDC/5A Power Supply with 100 to 240VAC input, -25~70°C
SDR-480-48	480W DIN-Rail 48VDC/10A Power Supply with 100 to 240VAC input, -25~70°C
Extended Type	
Model Name	Description
DRP024V060W1BN	60W DIN-Rail 24VDC/2.5A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP024V120W1BN	120W DIN-Rail 24VDC/5A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP024V240W1BN	240W DIN-Rail 24VDC/10A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP024V480W1BN	480W DIN-Rail 24VDC/20A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP048V060W1BN	60W DIN-Rail 48VDC/1.25A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP048V120W1BN	120W DIN-Rail 48VDC/2.5A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP048V240W1BN	240W DIN-Rail 48VDC/5A Power Supply with universal 100 to 240VAC input, extended type, -25~80°C
DRP048V480W1BN	480W DIN-Rail 48VDC/10A Power Supply with universal 100 to 240VAC input, extended type, -25~75°C



Product Selection Guide



Power Cord with Ferrule terminal (For Din-Rail Power Supply)	
Model Name	Description
PCF-AU	Power Cord with Ferrule terminal, AU plug
PCF-UK	Power Cord with Ferrule terminal, UK plug
PCF-US	Power Cord with Ferrule terminal, US plug
PCF-EU	Power Cord with Ferrule terminal, EU plug
PCF-JP	Power Cord with Ferrule terminal, JP plug

Power Adapter	
Model Name	Description
PAA-121000	12VDC/1000mA 12W Power Adapter with universal 100 to 240VAC input, US plug, 0~40°C
PAE-121000	12VDC/1000mA 12W Power Adapter with universal 100 to 240VAC input, EU plug, 0~40°C
PAA-123750	12VDC/3750mA 45W Power Adapter with universal 100 to 240VAC input, US plug, -40~75°C
PAE-123750	12VDC/3750mA 45W Power Adapter with universal 100 to 240VAC input, EU plug, -40~75°C
PAA-482500	48VDC/2500mA 120W Power Adapter with universal 100 to 240VAC input, US power cord, -30~70°C
PAE-482500	48VDC/2500mA 120W Power Adapter with universal 100 to 240VAC input, EU power cord, -30~70°C
PAA-502400	50VDC/2400mA 120W Power Adapter with universal 100 to 240VAC input, US power cord, -10~50°C
PAE-502400	50VDC/2400mA 120W Power Adapter with universal 100 to 240VAC input, EU power cord, -10~50°C

*Note: Other plugs upon request.

M-Series Cables and connectors		
Model Name	Description	Cable Length
M12C-4M4M-300	4-pin M12 Male to 4-pin M12 Male IP-67 Ethernet Cable, 3m, A-coding	3 m
M12C-4M4F-1000	4-pin M12 Male to 4-pin M12 Female IP-67 Ethernet Cable, 10m, A-coding	10 m
M12C-4M4F-3000	4-pin M12 Male to 4-pin M12 Female IP-67 Ethernet Cable, 30m, A-coding	30 m
M12C-4MRJ-300	4-pin M12 Male to RJ45 plug Ethernet Cable, 3m, A-coding	3 m
M12C-4M4M-300D	4-pin M12 Male to 4-pin M12 Male IP-67 Ethernet Cable, 3m, D-coding	3 m
M12C-4M4F-1000D	4-pin M12 Male to 4-pin M12 Female IP-67 Ethernet Cable, 10m, D-coding	10 m
M12C-4M4F-3000D	4-pin M12 Male to 4-pin M12 Female IP-67 Ethernet Cable, 30m, D-coding	30 m
M12C-4MRJ-300D	4-pin M12 Male to RJ45 Plug Ethernet Cable, 3m, D-coding	3 m
M12C-5MDB9-300	5-pin M12 Male to DB9 console Cable, 3m, A-coding	3 m
M12C-5M00-300	5-pin M12 Male to Tin-plated Bare Wire Power Cable, 3m, A-coding	3 m
M12C-5M5F-1000	5-pin M12 Male to 5-pin M12 Female IP-67 Cable, 10m, A-coding	10 m
M12C-5M5F-3000	5-pin M12 Male to 5-pin M12 Female IP-67 Cable, 30m, A-coding	30 m
M12C-8M8M-300	8-pin M12 Male to 8-pin M12 Male IP-67 Ethernet Cable, 3m, A-coding	3 m
M12C-8M8F-1000	8-pin M12 Male to 8-pin M12 Female IP-67 Ethernet Cable, 10m, A-coding	10 m
M12C-8M8F-3000	8-pin M12 Male to 8-pin M12 Female IP-67 Ethernet Cable, 30m, A-coding	30 m
M12C-8MRJ-300	8-pin M12 Male to RJ45 plug Ethernet Cable, 3m, A-coding	3 m
M12C-8M8M-300X	8-pin M12 Male to 8-pin M12 Male IP-67 Ethernet Cable, 3m, X-coding	3 m
M12C-8M8F-1000X	8-pin M12 Male to 8-pin M12 Female IP-67 Ethernet Cable, 10m, X-coding	10 m
M12C-8M8F-3000X	8-pin M12 Male to 8-pin M12 Female IP-67 Ethernet Cable, 30m, X-coding	30 m
M12C-8MRJ-300X	8-pin M12 Male to RJ45 plug Ethernet Cable, 3m, X-coding	3 m
M23C-5M00-300	5-pin M23 Male to Tin-plated Bare Wire Power Cable, 3m, A-coding	3 m
7/8C-5F00-300	5-pin 7/8 inch Female to Tin-plated Bare Wire Power Cable, 3m, A-coding	3 m
M12P-4MD	4-pin M12 Male Assembled Plug, Soldering type, D-coding	-
M12P-4MD-C	4-pin M12 Male Assembled Plug, IDC type, D-coding	-
M12P-4FS-S	4-pin M12 Female Assembled Plug, Screw type, S-coding	-
M12P-5MA	5-pin M12 Male Assembled Plug, Soldering type, A-coding	-

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point

Industrial Cellular VPN Router

Industrial M2M Gateway

Accessories

Network Management Software

Product Selection Guide



M12P-5MA-C	5-pin M12 Male Assembled Plug, IDC type, A-coding	-
M12P-5FA	5-pin M12 Female Assembled Plug, Soldering type, A-coding	-
M12P-5FA-C	5-pin M12 Female Assembled Plug, IDC type, A-coding	-
M12P-8MA	8-pin M12 Male Assembled Plug, Soldering type, A-coding	-
M12P-8MA-C	8-pin M12 Male Assembled Plug, IDC type, A-coding	-
M12P-8FA	8-pin M12 Female Assembled Plug, Soldering type, A-coding	-
M12P-8FA-C	8-pin M12 Female Assembled Plug, IDC type, A-coding	-
M12P-8MX-C	8-pin M12 Male Assembled Plug, IDC type, X-coding	-
M23P-5MA	5-pin M23 Male Assembled Plug, Soldering type, A-coding	-
M23P-5MAR-S	5-pin M23 Male Assembled Plug, Screw type, A-coding, right angled	-
7/8P-5FA	5-pin 7/8 inch Female Assembled Plug, Soldering type, A-coding	-
7/8P-5FAR-S	5-pin 7/8 inch Female Assembled Plug, Screw type, A-coding, right angled	-



RF Antenna Base (Magnetic)		
Model Name	Description	Cable Length
RFB-M2-150	N Female Magnetic WLAN RF Antenna Base, Cable length 1.5m, with SMA Male RS connector	1.5 m
RFB-M2-1000	N Female Magnetic WLAN RF Antenna Base, Cable length 10m, with SMA Male RS connector	10 m
RFB-M3-150	SMA Female RS Magnetic WLAN RF Antenna Base, Cable length 1.5m, with SMA Male RS connector	1.5m



RF Cable		
Model Name	Description	Cable Length
RFC-SFR-SMR-1000	Low loss RF Cable, Cable length 10m, RP-SMA Female to RP-SMA Male connector	10 m
RFC-SF-SMR-150	Low loss RF Cable, Cable length 1.5m, SMA Female to RP-SMA Male connector	1.5 m
RFC-SM-SMR-150	Low loss RF Cable, Cable length 1.5m, SMA Male to RP-SMA Male connector	1.5 m
RFC-NM-SMR-150	Low loss RF Cable, Cable length 1.5m, N Male to RP-SMA Male connector	1.5 m
RFC-NM-SMR-500	Low loss RF Cable, Cable length 5m, N Male to RP-SMA Male connector	5m
RFC-NM-SMR-1000	Low loss RF Cable, Cable length 10m, N Male to RP-SMA Male connector	10 m
RFC-NF-NM-50	Low loss RF Cable, Cable length 0.5m, N Female to N Male connector	0.5 m
RFC-NF-NM-500	Low loss RF Cable, Cable length 5m, N Female to N Male connector	5 m
RFC-NF-NM-1000	Low loss RF Cable, Cable length 10m, N Female to N Male connector	10 m
RFC-NM-NM-150	Low loss RF Cable, Cable length 1.5m, N Male to N Male connector	1.5m



RF Surge Protector	
Model Name	Description
RFP-NF-NM-WAG	High-power RF Surge Protector, 0~6GHz, N Female to N Male connector



WLAN RF Antenna (Outdoor Panel Type)	
Model Name	Description
RFA-P12-WG	Outdoor High-gain Panel Antenna, 2.4GHz, 12dbi max, N Female connector
RFA-P14-WA	Outdoor High-gain Panel Antenna, 5GHz, 14dbi max, N Female connector

Product Selection Guide



WLAN RF Antenna (Omni - Directional)	
Model Name	Description
RFA-O7-NM-WG	Omni-directional High-gain Dipole Antenna, 2.4GHz, 7dBi max, N Male connector
RFA-O9-NM-WG	Omni-directional High-gain Dipole Antenna, 2.4GHz, 9dBi max, N Male connector
RFA-O5-NM-WA	Omni-directional High-gain Dipole Antenna, 5GHz, 5dBi max, N Male connector
RFA-O10-NM-WA	Omni-directional High-gain Dipole Antenna, 5GHz, 10dBi max, N Male connector
RFA-O12-NF-WA	Omni-directional High-gain Dipole Antenna, 5GHz, 12dBi max, N Female connector with wall-mount bracket
RFA-O8-NM-WAG	Omni-directional High-gain Dipole Antenna, 2.4/5GHz, 6/8dBi max, N Male connector



RF Antenna (Dome Type)	
Model Name	Description
RFA-D9-SM-WG	WLAN RF Dome Antenna 2.4GHz, 9dBi max, 2.4GHz, SMA Male connector
RFA-D28-SM-AG-3M	GPS Active Antenna, 1575 MHz, 28dBi max, Magnetic with 3m SMA Male cable



RF Antenna (Roof Type)	
Model Name	Description
RFA-O5-NF3-W3GGS-028	Omni-directional Roof Antenna, 2G/3G/4G, Wifi and GPS applications, 5dBi max, N Female connector

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point

Industrial Cellular VPN Router

Industrial M2M Gateway

Accessories

Network Management Software

Product Selection Guide

Accessories Fast Ethernet SFP modules



Specifications

Characteristics	Model name				
	SFP100-MM/-I	SFP100-SS30/-I	SFP100-SS60/-I	SFP100-SS100/-I	* SFP100-SS120/-I
Fiber mode	multi-mode	single-mode	single-mode	single-mode	single-mode
Typical Distance	2 km	30 km	60 km	100 km	120 km
Operating Temperature	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)
Wavelength	1310 nm	1310 nm	1310 nm	1550 nm	1550 nm
Optical Output Power 9/125 μm fiber (Max. TX)	-	-8 dBm	0 dBm	0 dBm	5 dBm
Optical Output Power 9/125 μm fiber (Min. TX)	-	-15 dBm	-5 dBm	-5 dBm	0 dBm
Optical Output Power 62.5/125 μm fiber (Max. TX)	-14 dBm	-	-	-	-
Optical Output Power 62.5/125 μm fiber (Min. TX)	-20 dBm	-	-	-	-
Optical Output Power 50/125 μm fiber (Max. TX)	-14 dBm	-	-	-	-
Optical Output Power 50/125 μm fiber (Min. TX)	-23.5 dBm	-	-	-	-
Optical Input Power-minimum (Sensitivity)	-31 dBm	-34 dBm	-35 dBm	-35 dBm	-35 dBm
Optical Input Power-maximum (Saturation)	-8 dBm	0 dBm	0 dBm	0 dBm	0 dBm
Link Budget	7.5 dB	19 dB	30 dB	30 dB	35 dB

* If two SFP transceivers are connected to each other in a short distance and the received optical power is greater than the listed specification of the received SFP transceiver, please add an optical attenuator (Please refer to FAT-LC series accessories) to avoid any possible damages.

Ordering Information

Model Name	Description
SFP100-MM	100Mbps SFP optical transceiver, multi-mode / 2km, 1310nm, 0 ~ 70°C
SFP100-MM-I	100Mbps SFP optical transceiver, multi-mode / 2km, 1310nm, industrial grade, -40 ~ 85°C
SFP100-SS30	100Mbps SFP optical transceiver, single-mode / 30km, 1310nm, 0 ~ 70°C
SFP100-SS30-I	100Mbps SFP optical transceiver, single-mode / 30km, 1310nm, industrial grade, -40 ~ 85°C
SFP100-SS60	100Mbps SFP optical transceiver, single-mode / 60km, 1310nm, 0 ~ 70°C
SFP100-SS60-I	100Mbps SFP optical transceiver, single-mode / 60km, 1310nm, industrial grade, -40 ~ 85°C
SFP100-SS100	100Mbps SFP optical transceiver, single-mode / 100km, 1550nm, 0 ~ 70°C
SFP100-SS100-I	100Mbps SFP optical transceiver, single-mode / 100km, 1550nm, industrial grade, -40 ~ 85°C
SFP100-SS120	100Mbps SFP optical transceiver, single-mode / 120km, 1550nm, 0 ~ 70°C
SFP100-SS120-I	100Mbps SFP optical transceiver, single-mode / 120km, 1550nm, industrial grade, -40 ~ 85°C

Product Selection Guide

Accessories

Fast Ethernet BIDI-SFP modules



Specifications

Characteristics	Model Name					
	SFP100B3-SS20/-I	SFP100B5-SS20/-I	SFP100B3-SS40/-I	SFP100B5-SS40/-I	SFP100B3-SS60/-I	SFP100B5-SS60/-I
Fiber mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode
Typical Distance	20 km	20 km	40 km	40 km	60 km	60 km
Operating Temperature	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)
Wavelength	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm
Optical Output Power 9/125 μm fiber (Max. TX)	-8 dBm	-8 dBm	0 dBm	0 dBm	0 dBm	0 dBm
Optical Output Power 9/125 μm fiber (Min. TX)	-14 dBm	-14 dBm	-8 dBm	-8 dBm	-5 dBm	-5 dBm
Optical Input Power-minimum (Sensitivity)	-32 dBm	-32 dBm	-34 dBm	-34 dBm	-34 dBm	-34 dBm
Optical Input Power-maximum (Saturation)	0 dBm	0 dBm	0 dBm	0 dBm	0 dBm	0 dBm
Link Budget	18 dB		26 dB		29 dB	

Ordering Information

Model Name	Description
SFP100B3-SS20	100Mbps SFP optical transceiver, single-mode BIDI / 20km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP100B3-SS20-I	100Mbps SFP optical transceiver, single-mode BIDI / 20km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP100B5-SS20	100Mbps SFP optical transceiver, single-mode BIDI / 20km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP100B5-SS20-I	100Mbps SFP optical transceiver, single-mode BIDI / 20km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C
SFP100B3-SS40	100Mbps SFP optical transceiver, single-mode BIDI / 40km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP100B3-SS40-I	100Mbps SFP optical transceiver, single-mode BIDI / 40km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP100B5-SS40	100Mbps SFP optical transceiver, single-mode BIDI / 40km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP100B5-SS40-I	100Mbps SFP optical transceiver, single-mode BIDI / 40km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C
SFP100B3-SS60	100Mbps SFP optical transceiver, single-mode BIDI / 60km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP100B3-SS60-I	100Mbps SFP optical transceiver, single-mode BIDI / 60km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP100B5-SS60	100Mbps SFP optical transceiver, single-mode BIDI / 60km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP100B5-SS60-I	100Mbps SFP optical transceiver, single-mode BIDI / 60km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C

Product Selection Guide

Accessories

Gigabit Ethernet SFP modules



Specifications

Characteristics	Model Name									
	SFP1G-SX/-I	SFP1G-MLX/-I	SFP1G-LX10/-I	*SFP1G-LX20/-I	*SFP1G-LHX30/-I	*SFP1G-LHX40/-I	*SFP1G-XD50/-I	*SFP1G-ZX70/-I	*SFP1G-ZX80/-I	*SFP1G-EZX120/-I
Fiber mode	multi-mode	multi-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode
Typical Distance	550 m	62.5/125 : 2km 50/125 : 1km	10 km	20 km	30 km	40 km	50 km	70 km	80 km	120 km
Operating Temperature	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)
Wavelength	850 nm	1310 nm	1310 nm	1310 nm	1310 nm	1310 nm	1550 nm	1550 nm	1550 nm	1550 nm
Optical Output Power 9/125 μm fiber (Max. TX)	-	-	-3 dBm	-2 dBm	1 dBm	1 dBm	1 dBm	5 dBm	5 dBm	5 dBm
Optical Output Power 9/125 μm fiber (Min. TX)	-	-	-9.5 dBm	-8 dBm	-4 dBm	-4 dBm	-4 dBm	0 dBm	0 dBm	0 dBm
Optical Output Power 62.5/125 μm fiber (Max. TX)	-4 dBm	-1 dBm	-	-	-	-	-	-	-	-
Optical Output Power 62.5/125 μm fiber (Min. TX)	-9.5 dBm	-9 dBm	-	-	-	-	-	-	-	-
Optical Output Power 50/125 μm fiber (Max. TX)	-4 dBm	-1 dBm	-	-	-	-	-	-	-	-
Optical Output Power 50/125 μm fiber (Min. TX)	-9.5 dBm	-9 dBm	-	-	-	-	-	-	-	-
Optical Input Power-minimum (Sensitivity)	-18 dBm	-19 dBm	-20 dBm	-23 dBm	-24 dBm	-24 dBm	-24 dBm	-24 dBm	-24 dBm	-32 dBm
Optical Input Power-maximum(Saturation)	0 dBm	-1 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-3 dBm	-8 dBm
Link Budget	8.5 dB	10 dB	10.5 dB	15 dB	20 dB	20 dB	20 dB	24 dB	24 dB	32 dB

* If two SFP transceivers are connected to each other in a short distance and the received optical power is greater than the listed specification of the received SFP transceiver, please add an optical attenuator(Please refer to FAT-LC series accessories) to avoid any possible damages.

Ordering Information

Model Name	Description
SFP1G-SX	1Gbps SFP optical transceiver, multi-mode / 550m, 850nm, 0 ~ 70°C
SFP1G-SX-I	1Gbps SFP optical transceiver, multi-mode / 550m, 850nm, industrial grade, -40 ~ 85°C
SFP1G-MLX	1Gbps SFP optical transceiver, multi-mode / 2km, 1310nm, 0 ~ 70°C
SFP1G-MLX-I	1Gbps SFP optical transceiver, multi-mode / 2km, 1310nm, industrial grade, -40 ~ 85°C
SFP1G-LX10	1Gbps SFP optical transceiver, single-mode / 10km, 1310nm, 0 ~ 70°C
SFP1G-LX10-I	1Gbps SFP optical transceiver, single-mode / 10km, 1310nm, industrial grade, -40 ~ 85°C
SFP1G-LX20	1Gbps SFP optical transceiver, single-mode / 20km, 1310nm, 0 ~ 70°C
SFP1G-LX20-I	1Gbps SFP optical transceiver, single-mode / 20km, 1310nm, industrial grade, -40 ~ 85°C
SFP1G-LHX30	1Gbps SFP optical transceiver, single-mode / 30km, 1310nm, 0 ~ 70°C
SFP1G-LHX30-I	1Gbps SFP optical transceiver, single-mode / 30km, 1310nm, industrial grade, -40 ~ 85°C
SFP1G-LHX40	1Gbps SFP optical transceiver, single-mode / 40km, 1310nm, 0 ~ 70°C
SFP1G-LHX40-I	1Gbps SFP optical transceiver, single-mode / 40km, 1310nm, industrial grade, -40 ~ 85°C
SFP1G-XD50	1Gbps SFP optical transceiver, single-mode / 50km, 1550nm, 0 ~ 70°C
SFP1G-XD50-I	1Gbps SFP optical transceiver, single-mode / 50km, 1550nm, industrial grade, -40 ~ 85°C
SFP1G-ZX70	1Gbps SFP optical transceiver, single-mode / 70km, 1550nm, 0 ~ 70°C
SFP1G-ZX70-I	1Gbps SFP optical transceiver, single-mode / 70km, 1550nm, industrial grade, -40 ~ 85°C
SFP1G-ZX80	1Gbps SFP optical transceiver, single-mode / 80km, 1550nm, 0 ~ 70°C
SFP1G-ZX80-I	1Gbps SFP optical transceiver, single-mode / 80km, 1550nm, industrial grade, -40 ~ 85°C
SFP1G-EZX120	1Gbps SFP optical transceiver, single-mode / 120km, 1550nm, 0 ~ 70°C
SFP1G-EZX120-I	1Gbps SFP optical transceiver, single-mode / 120km, 1550nm, industrial grade, -40 ~ 85°C

Product Selection Guide

Accessories

Gigabit Ethernet BIDI-SFP modules



Specifications

Characteristics	Model Name									
	SFP1GB3-LX10/-I	SFP1GB5-LX10/-I	SFP1GB3-LX20/-I	SFP1GB5-LX20/-I	* SFP1GB3-LX40/-I	* SFP1GB5-LX40/-I	* SFP1GB3-LX60/-I	* SFP1GB5-LX60/-I	* SFP1GB4-LX80/-I	* SFP1GB5-LX80/-I
Fiber mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode	single-mode
Typical Distance	10 km	10 km	20 km	20 km	40 km	40 km	60 km	60 km	80 km	80 km
Operating Temperature	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C	0~70°C -40~85°C
Wavelength	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm	TX : 1310 nm RX : 1550 nm	TX : 1550 nm RX : 1310 nm	TX : 1490 nm RX : 1550 nm	TX : 1550 nm RX : 1490 nm
Optical Output Power 9/125 μm fiber (Max. TX)	-3 dBm	-3 dBm	-2 dBm	-2 dBm	2 dBm	2 dBm	5 dBm	4 dBm	4 dBm	4 dBm
Optical Output Power 9/125 μm fiber (Min. TX)	-9 dBm	-9 dBm	-8 dBm	-8 dBm	-3 dBm	-3 dBm	0 dBm	-2 dBm	-2 dBm	-2 dBm
Optical Input Power-minimum (Sensitivity)	-21 dBm	-21 dBm	-23 dBm	-23 dBm	-23 dBm	-23 dBm	-24 dBm	-25 dBm	-25 dBm	-25 dBm
Optical Input Power-maximum (Saturation)	-1 dBm	-1 dBm	-1 dBm	-1 dBm	-1 dBm	-1 dBm	-1 dBm	-1 dBm	-3 dBm	-3 dBm
Link Budget	12 dB		15 dB		20 dB		22 dB		23 dB	

* If two SFP transceivers are connected to each other in a short distance and the received optical power is greater than the listed specification of the received SFP transceiver, please add an optical attenuator (Please refer to FAT-LC series accessories) to avoid any possible damages.

Ordering Information

Model Name	Description
SFP1GB3-LX10	1Gbps SFP optical transceiver, single-mode BIDI / 10km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP1GB3-LX10-I	1Gbps SFP optical transceiver, single-mode BIDI / 10km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP1GB5-LX10	1Gbps SFP optical transceiver, single-mode BIDI / 10km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP1GB5-LX10-I	1Gbps SFP optical transceiver, single-mode BIDI / 10km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C
SFP1GB3-LX20	1Gbps SFP optical transceiver, single-mode BIDI / 20km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP1GB3-LX20-I	1Gbps SFP optical transceiver, single-mode BIDI / 20km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP1GB5-LX20	1Gbps SFP optical transceiver, single-mode BIDI / 20km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP1GB5-LX20-I	1Gbps SFP optical transceiver, single-mode BIDI / 20km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C
SFP1GB3-LX40	1Gbps SFP optical transceiver, single-mode BIDI / 40km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP1GB3-LX40-I	1Gbps SFP optical transceiver, single-mode BIDI / 40km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP1GB5-LX40	1Gbps SFP optical transceiver, single-mode BIDI / 40km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP1GB5-LX40-I	1Gbps SFP optical transceiver, single-mode BIDI / 40km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C
SFP1GB3-LX60	1Gbps SFP optical transceiver, single-mode BIDI / 60km, TX1310nm, RX1550nm, 0 ~ 70°C
SFP1GB3-LX60-I	1Gbps SFP optical transceiver, single-mode BIDI / 60km, TX1310nm, RX1550nm, industrial grade, -40 ~ 85°C
SFP1GB5-LX60	1Gbps SFP optical transceiver, single-mode BIDI / 60km, TX1550nm, RX1310nm, 0 ~ 70°C
SFP1GB5-LX60-I	1Gbps SFP optical transceiver, single-mode BIDI / 60km, TX1550nm, RX1310nm, industrial grade, -40 ~ 85°C
SFP1GB4-LX80	1Gbps SFP optical transceiver, single-mode BIDI / 80km, 1490nm, 1550nm, 0 ~ 70°C
SFP1GB4-LX80-I	1Gbps SFP optical transceiver, single-mode BIDI / 80km, 1490nm, 1550nm, industrial grade, -40 ~ 85°C
SFP1GB5-LX80	1Gbps SFP optical transceiver, single-mode BIDI / 80km, 1550nm, 1490nm, 0 ~ 70°C
SFP1GB5-LX80-I	1Gbps SFP optical transceiver, single-mode BIDI / 80km, 1550nm, 1490nm, industrial grade, -40 ~ 85°C

Product Selection Guide

Accessories

10G Ethernet SFP+ modules with Diagnostic Monitoring



Specifications

Characteristics	Model Name			
	SFP10G-MM/-I	SFP10G-LR10/-I	SFP10G-ER40/-I	SFP10G-ZR80/-I
Fiber mode	multi-mode	single-mode	single-mode	single-mode
Typical Distance	62.5/125um : 33m 50/125um(OM2) : 82m 50/125um(OM3) : 300m	10 km	40 km	80 km
Operating Temperature	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)	0~70°C -40~85°C (-I model)
Wavelength	850 nm	1310 nm	1550 nm	1550 nm
Optical Output Power 9/125 μm fiber (Max. TX)	-	0.5 dBm	4 dBm	4 dBm
Optical Output Power 9/125 μm fiber (Min. TX)	-	-8 dBm	-4.7 dBm	0 dBm
Optical Output Power 62.5/125 μm fiber (Max. TX)	-1 dBm	-	-	-
Optical Output Power 62.5/125 μm fiber (Min. TX)	-6.5 dBm	-	-	-
Optical Output Power 50/125 μm fiber (Max. TX)	-1 dBm	-	-	-
Optical Output Power 50/125 μm fiber (Min. TX)	-6.5 dBm	-	-	-
Optical Input Power-minimum (Sensitivity)	-9.9 dBm	-14.4 dBm	-14.1 dBm	-20 dBm
Optical Input Power-maximum (Saturation)	-1 dBm	0.5 dBm	-1 dBm	-7 dBm
Link Budget	3.4 dB	6.4 dB	9.4 dB	20 dB

Ordering Information

Model Name	Description
SFP10G-MM	10Gbps SFP+ optical transceiver, multi-mode / 300m, 850nm, 0 ~ 70°C
SFP10G-MM-I	10Gbps SFP+ optical transceiver, multi-mode / 300m, 850nm, industrial grade, -40 ~ 85°C
SFP10G-LR10	10Gbps SFP+ optical transceiver, single-mode / 10km, 1310nm, 0 ~ 70°C
SFP10G-LR10-I	10Gbps SFP+ optical transceiver, single-mode / 10km, 1310nm, industrial grade, -40 ~ 85°C
SFP10G-ER40	10Gbps SFP+ optical transceiver, multi-mode / 40m, 1550nm, 0 ~ 70°C
SFP10G-ER40-I	10Gbps SFP+ optical transceiver, multi-mode / 40m, 1550nm, industrial grade, -40 ~ 85°C
SFP10G-ZR80	10Gbps SFP+ optical transceiver, single-mode / 80km, 1550nm, 0 ~ 70°C
SFP10G-ZR80-I	10Gbps SFP+ optical transceiver, single-mode / 80km, 1550nm, industrial grade, -40 ~ 85°C

Product Selection Guide

Accessories

Gigabit Ethernet SFP-RJ45 modules



Specifications

	Model Name	
Characteristics	SFP1GRJ	SFP1GRJ-I
Operating Temperature	0~70°C	-40~85°C
RJ45 Operation mode	1000Base-T*	1000Base-T*
SFP Interface	SERDES, 1000Base-X	SERDES, 1000Base-X

* Please notice 10/100Base-T(X) mode is not supported

Ordering Information

Model Name	Description
SFP1GRJ	1Gbps SFP to 1000 Base-T transceiver, 0 ~ 70°C
SFP1GRJ-I	1Gbps SFP to 1000 Base-T transceiver, industrial grade, -40 ~ 85°C

10G Ethernet SFP+ Copper Cable



Specifications

	Model Name			
Characteristics	SFPC10G-50	SFPC10G-100	SFPC10G-300	SFPC10G-500
Max.Speed	10 Gbps	10 Gbps	10 Gbps	10 Gbps
Wire Gauge	30 AWG	30 AWG	30 AWG	24 AWG
Low Smoke Zero Halogen	•	•	•	•
Cable length	0.5 m	1 m	3 m	5 m
Operating temperature	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C

Ordering Information

Model Name	Description	Cable length
SFPC10G-50	10Gbps SFP+ copper cable 30AWG, 0.5 m, -40 ~ 85°C	0.5 m
SFPC10G-100	10Gbps SFP+ copper cable 30AWG, 1 m, -40 ~ 85°C	1 m
SFPC10G-300	10Gbps SFP+ copper cable 30AWG, 3 m, -40 ~ 85°C	3 m
SFPC10G-500	10Gbps SFP+ copper cable 24AWG, 5 m, -40 ~ 85°C	5 m