


1/4 Hex Female Standoff

Hex Code Table	
FCXXXX	Length (L)
FC2098	1/8
FC2099	3/16
FC2100	1/4
FC2101	5/16
FC2102	3/8
FC2103	7/16
FC2104	1/2
FC2105	9/16
FC2106	5/8
FC2107	11/16
FC2108	3/4
FC2109	13/16
FC2110	7/8
FC2111	15/16
FC2112	1
FC2113	1-1/16
FC2114	1-1/8
FC2115	1-3/16
FC2116	1-1/4
FC2117	1-5/16
FC2118	1-3/8
FC2119	1-7/16
FC2120	1-1/2
FC2121	1-9/16
FC2122	1-5/8
FC2123	1-11/16
FC2124	1-3/4
FC2125	1-13/16
FC2126	1-7/8
FC2127	1-15/16
FC2128	2
FC2129	2-1/8
FC2130	2-1/4
FC2131	2-3/8
FC2132	2-1/2
FC2133	2-5/8
FC2134	2-3/4
FC2135	2-7/8
FC2136	3
FC2137	3-1/4
FC2138	3-1/2
FC2139	3-3/4
FC2140	4
FC2141	4-1/4
FC2142	4-1/2
FC2143	4-3/4
FC2144	5
FC2145	5-1/4
FC2146	5-1/2
FC2147	5-3/4
FC2148	6

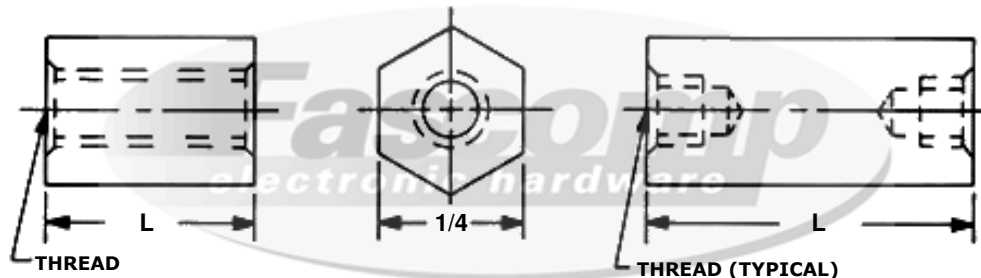

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

✓	Thread			
	Thread Code (XXX)	Tapped Thru		Longer Parts
		A, B, S	SS	Blind Tap Depth
	440	1	3/4	1/4
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓	Material Code (XX)
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.