


HALF-CUT ROUND TUBING SOLUTIONS



Round tubing for wire marking may be a less familiar method than heat shrink or wrap around, but with the MAX LETATWIN half-cut technology, productivity for tube wire marking is significantly increased. It does not require heaters, scissors or screwdrivers. Just pull apart the half-cut tubing by hand, and insert the wire to make your excellent marker!

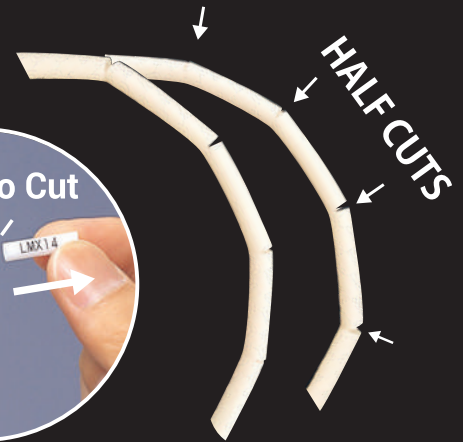

Cutting out with Scissors




Peel off & Wrap around



Using Heat Gun



Open the Tubing with a Screwdriver

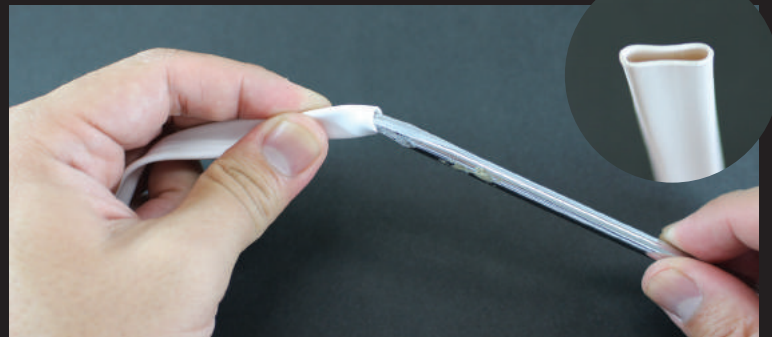

MAX LETATWIN

How it works



Check the wire diameter.



Wire Size			Recommended Tubing Diameter (φ mm)
AWG	SQ	DIN	
AWG 22	0.30	0.34	1.5-2.0
AWG 20	0.50	0.50	2.5
AWG 18	0.75	0.75	3.2
AWG 16	1.25	1.50	3.6
AWG 14	2.00	2.50	3.6
AWG 12	3.50	4.00	4.2
AWG 10	5.50	6.00	5.2
AWG 8	8.00	10.00	6.0-6.5
AWG 6	14.00	16.00	8.0

Select appropriate tubing size.



Set the tubing on LETATWIN.

Make a loop at the end of the wire.





to prevent tubing from falling off.

You can carry the half cut printed tubing.



LETATWIN prints and half cut the tubing.

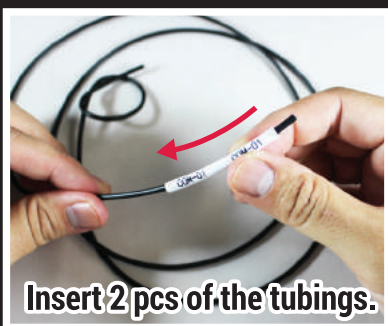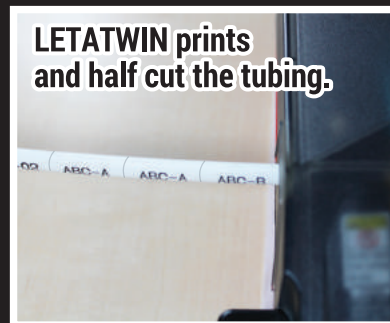

Insert 2 pcs of the tubings.



Strip and Crimp.



Done!



MAX UL Round Tubing
LM-TU3xxN2 series
(105°C, 600V, E171616)



LM-TU332N2 White	3.2mm dia. x 100m
LM-TU336N2 White	3.6mm dia. x 100m
LM-TU342N2 White	4.2mm dia. x 80m
LM-TU352N2 White	5.2mm dia. x 80m

LETATWIN Consumables and Printer


LETATWIN Round Tubing

UL TUBING (VINYL) 1ROLL/BOX

LM-TU332N2 WHITE	φ 3.2mm× 100m/ROLL
LM-TU336N2 WHITE	φ 3.6mm× 100m/ROLL
LM-TU342N2 WHITE	φ 4.2mm× 80m/ROLL
LM-TU352N2 WHITE	φ 5.2mm× 80m/ROLL

VINYL TUBING (NOT UL ACQUIRED) 1ROLL/BOX

LM-TU432L WHITE	φ 3.2mm× 200m/ROLL
LM-TU436L WHITE	φ 3.6mm× 200m/ROLL
LM-TU442L WHITE	φ 4.2mm× 200m/ROLL
LM-TU452L WHITE	φ 5.2mm× 135m/ROLL
LM-TU464L WHITE	φ 6.4mm× 100m/ROLL
LM-TU480L WHITE	φ 8.0mm× 70m/ROLL



LETATWIN Printer LM-550A/PC

Name	ELECTRONIC LETTERING MACHINE LM 550A/PC	Printing speed	40mm/s (Standard) 20mm/s (Low temp. mode)
Dimensions	295 (W)× 293 (D)× 94 (H) mm	Interface	USB 2.0 full speed
Weight	2.4kg	Power supply	DC12V, 3.0A <small>Use only specified AC Adapter (100V~240V) included in the package</small>
Printing method	Thermal transfer method (300dpi)	Usable tube	φ 1.5mm ~ 8.0mm (Vinyl Tubing) [For φ 1.5~2.0mm tubes, the dedicated attachment (standard accessory) is required.]
Display	LCD dot matrix : 64×160 Pixel (Backlit)	Usable tape	Width 5, 9, 12mm (Max genuine tape)
Internal memory	250,000 characters (Maximum 50 files)		
External memory	USB memory		


Consumables are only LM-IR50B(Black ink-ribbon)
1roll and LM-RC500(Ink Ribbon Case) 1pcs included in Carry Case

LETATWIN Ink Ribbon and Tape

INK RIBBON CASE

LM-RC500

20PCS./CTN



ECONOMICAL

INK RIBBON REFILLS 10 ROLLS/BOX

LM-IR50B (BLACK)

110m/ROLL

INK RIBBON REFILLS FOR HEAT SHRINK TUBING 10 ROLLS/BOX

LM-IR50BP (BLACK)

110m/ROLL

LM-IR50W (WHITE)

70m/ROLL

POLYESTER TAPE CASSETTE 10PCS./BOX

LM-TP505W (WHITE)

5mm(W)× 16m(L)/PC

LM-TP505Y (YELLOW)

5mm(W)× 8m(L)/PC

LM-TP505T (TRANSPARENT)

5mm(W)× 8m(L)/PC

LM-TP509W (WHITE)

9mm(W)× 16m(L)/PC

LM-TP509Y (YELLOW)

9mm(W)× 8m(L)/PC

LM-TP509T (TRANSPARENT)

9mm(W)× 8m(L)/PC

LM-TP512W (WHITE)

12mm(W)× 16m(L)/PC

LM-TP512Y (YELLOW)

12mm(W)× 8m(L)/PC



MAX

MAX USA CORP.

257 East 2nd Street, Mineola, NY 11501
Phone: 800-223-4293 Fax: 516-741-3272
WWW.MAXUSACORP.COM/SIGN_MARKING

Watch the introduction and testimonial videos through our website ▶▶▶

