

DESCRIPTION: FEMALE - DIP SOLDER / MACHINED - PREMIUM

DIMENSIONS(mm)							
SIZE	A ^{±.36}	B ^{±.10}	C ^{±.15}	D ^{±.15}	E ^{±.38}	F ^{±.25}	G ^{±.25}
9	30.80	24.99	16.30	8.00	19.20	12.60	10.90
15	39.15	33.32	24.60	8.00	27.70	12.60	10.90
25	53.04	47.04	38.40	8.00	41.10	12.60	10.90
37	69.32	63.50	54.80	8.00	57.30	12.60	10.90
50	66.93	61.11	52.30	10.80	55.10	15.20	13.60

MATERIAL:

SHELL: STEEL, NICKEL PLATED
 INSULATOR: PA6T, UL94 V-0
 PROCESS TEMP.: 260°C
 CONTACT: BRASS (FLOATING CONTACTS)

ELECTRICAL:



CURRENT RATING: 5 AMPS
 CONTACT RESISTANCE: 15 mOhms Max.
 INSULATION RESISTANCE: 1,000 MOhms Min.
 VOLTAGE: 500VAC FOR 1 MINUTE
 TEMPERATURE: -50° C TO 100° C

172-YYY-213RYY1

SERIES _____
 POSITIONS _____
 009 _____
 015 _____
 025 _____
 037 _____
 050 _____
 GENDER _____
 2 = FEMALE
 TERMINATION _____
 1 = DIP SOLDER
 SHELL PLATING _____
 3 = NICKEL



HARDWARE OPTIONS _____
 00 = NO HARDWARE
 01 = .065" NUT (PCB SIDE)
 02 = .250" NUT (PCB SIDE)
 03 = .250" NUT (MATING SIDE)
 05 = .237" 4-40 BOARD LOCK
 90 = .237" 4-40 BOARD LOCK
 FOR 0.093" BOARD MAX.
 91 = .237" 4-40 SPACER/ BOARD LOCK
 92 = .237" 4-40 SPACER/ BOARD LOCK
 FOR 0.093" BOARD MAX.

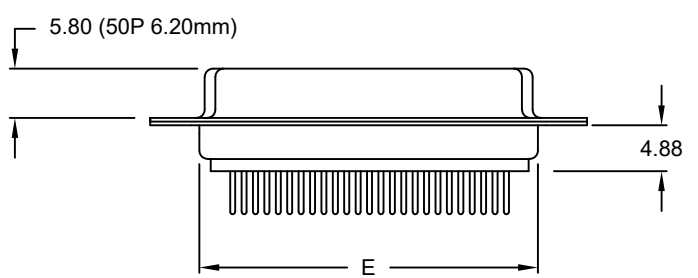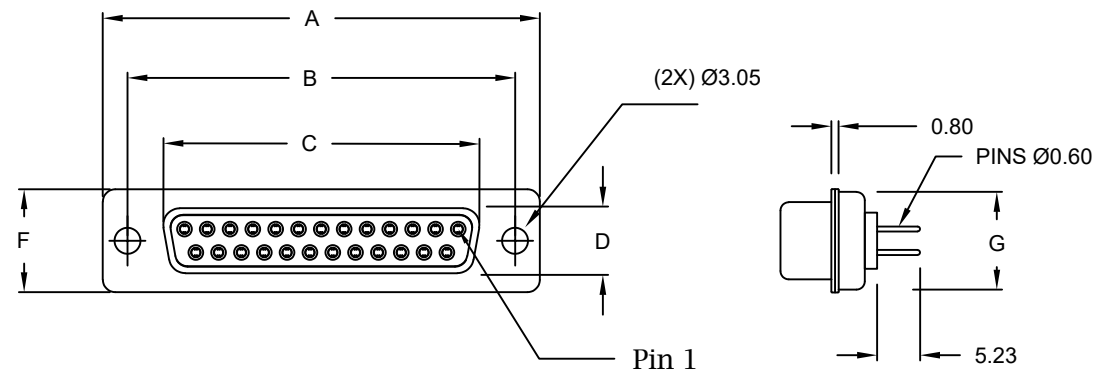PLATING OPTIONS _____
 1 = GOLD FLASH
 2 = 30MICRO-INCH GOLD








DO NOT SCALE FROM DRAWING

UNITS = mm

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 09-12-05
			SCALE: NTS	SHEET OF 1 3
			DWG NO. 172-YYY-213RYY1	

RoHS COMPLIANT

DESCRIPTION: PCB LAYOUT - STANDARD DSUB

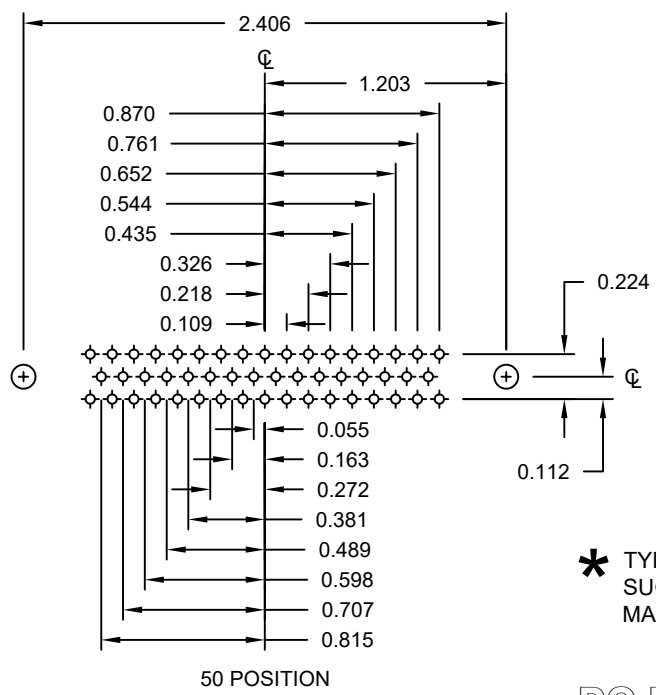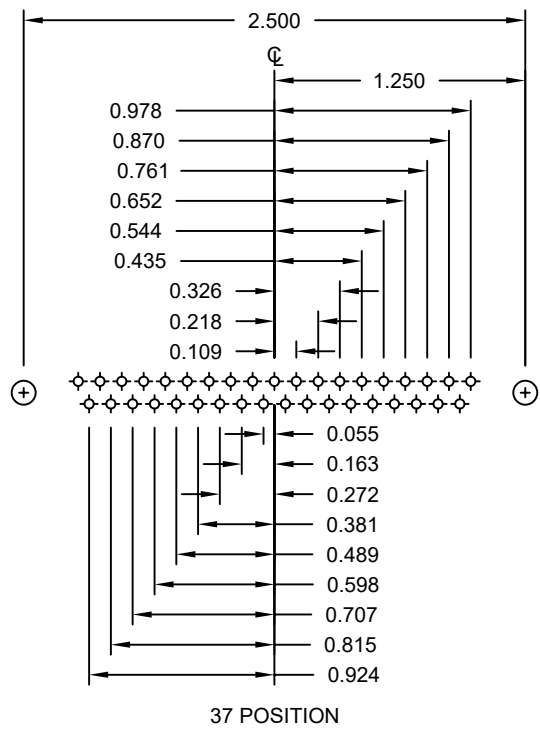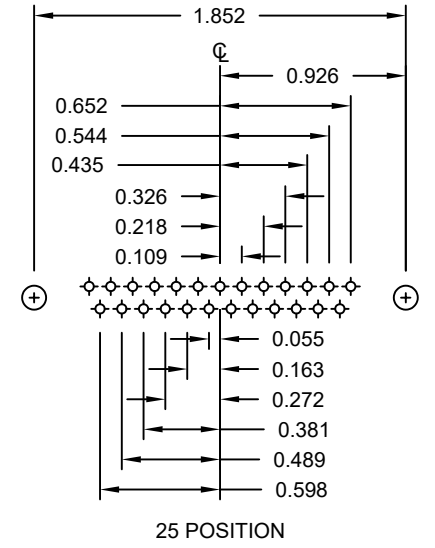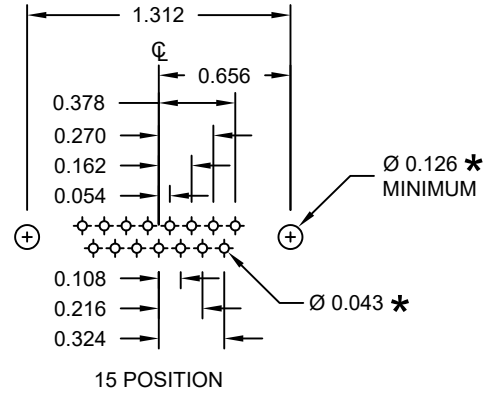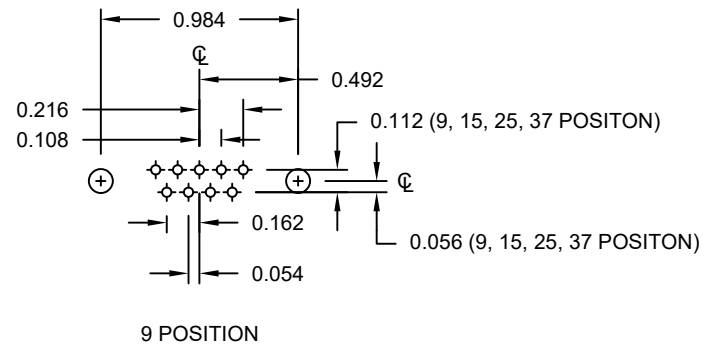

UNITS = inch
 * TYP. SUGGESTED SIZE MAY NOT BE SUITABLE FOR ALL APPLICATIONS

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 09-12-05
	<h1>NorComp</h1>		SCALE: NTS	SHEET OF 2 3
DWG NO. 172-YYY-213RYY1				


DESCRIPTION: CLINCH NUT HARDWARE

TOLERANCE:
 ALL DIMENSIONS ARE ±0.010
 UNLESS OTHERWISE
 SPECIFIED


ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

****NOTE: 90 & 92 OPTION FOR 0.093" MAX. BOARD THICKNESS**


"01" // PCB SIDE




"02" // PCB SIDE




"03" // MATING SIDE

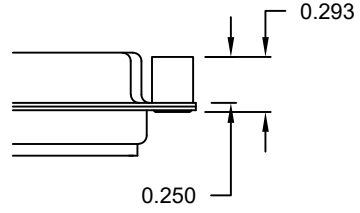


"05" // PCB SIDE

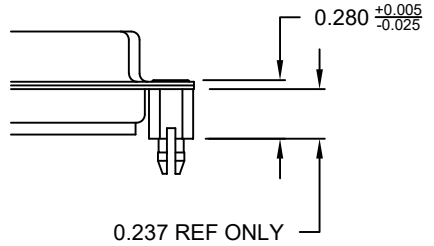

"91" // PCB SIDE

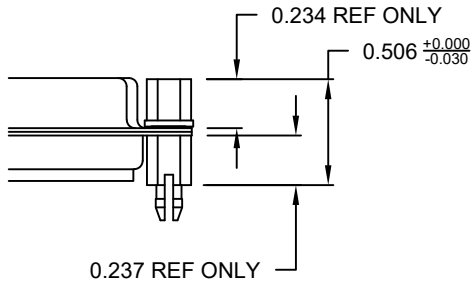


"90" // PCB SIDE **

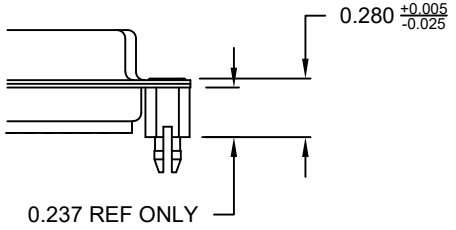

NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

"92" // PCB SIDE **

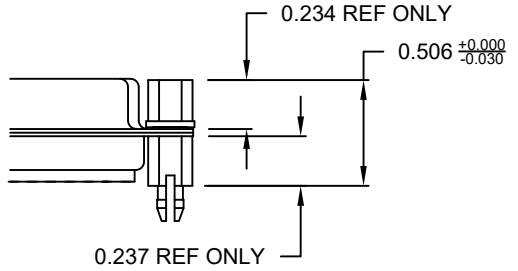

UNITS = inch

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 09-12-05
	<h1>NorComp</h1>		SCALE: NTS	SHEET 3 OF 3
DWG NO. 172-YYY-213RYY1				

RoHS COMPLIANT